

EN

PCE

Connection
to the future



TOP TAURUS 2
Der Schutzkontaktstecker


MADE IN AUSTRIA



**STRONG
QUICK
UNIQUE**



100%
MADE IN AUSTRIA

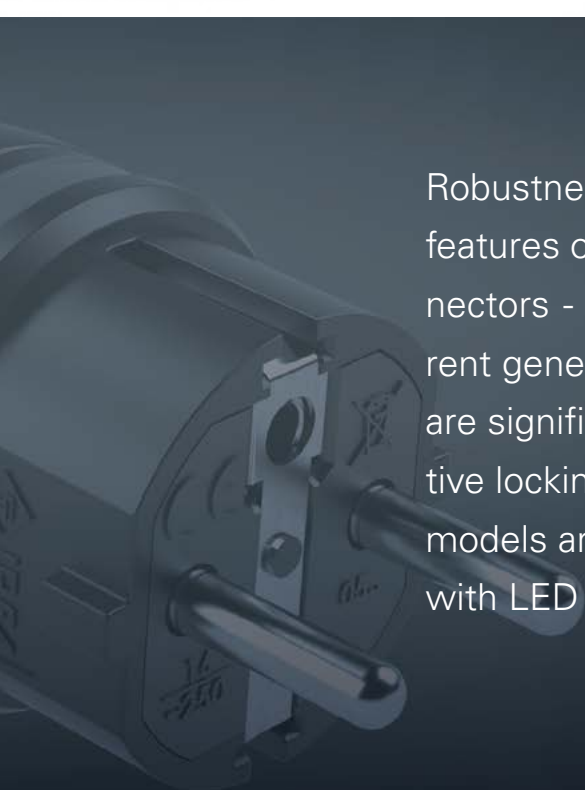

Robustness and ease of installation are the outstanding features of our TopTaurus series of safety plugs and connectors - made for professionals since 2006. In the current generation **TOPTAURUS2**, the connection times are significantly reduced once again thanks to the innovative locking mechanism. Additionally all connector models are now optionally available with LED voltage indicator.



TOP TAURUS²

Der Schutzkontaktstecker



LED voltage indicator
(optionally available)

2 different **covers**
(hinged lid and cap with band)

Modern, robust
Design - no more
housing screws



Perfect **cable entry**
with **bend protection**
and strain relief for cable
diameter Ø 6-14mm

Contact carrier
dual earthing system (PA6)

Rubberized housing
for optimal **feel**
and perfect **grip**

STRONG

TAURUS [lat.] - THE BULL



6 COLOR-VARIATIONS



Standard
black/red



Midnight
black/black



Special colors
on request



LED voltage indicator

for visual indication if voltage is present.
The LED offers particular advantages when testing the insulation resistance between L and N during repeating tests.



TOP TAURUS²

Der Schutzkontaktstecker



open +/- contact
screws (PH2)

funnel inlet of
conductors

PE terminal leading
(no need to shorten
L and N conductor)

100%
MADE IN AUSTRIA

QUICK & EASY ASSEMBLY

...due to screwless quick locking system



external strain relief

screwless
quick locking
system

- ✓ no housing screws = minimum assembly time
- ✓ tool-free quick locking system of housing cover and strain relief in combination
- ✓ rubberized surface for optimal feel and perfect grip
- ✓ easy mounting and dismounting of the contact carrier
- ✓ open contact screws - all operable from one direction
- ✓ optional LED operating voltage indicator for connectors




for severe conditions (IP54 only) • 16A 250V~

Plug IP54

Safety plug series TOPTAURUS²

- material: PA6, 2-component rubberized
- system: dual earthing system
- screwless quick locking system for housing cover and strain relief
- standard color: black (similar to RAL9005) / red (similar to RAL3000)
- protection class: **IP54** dust- and splashproof

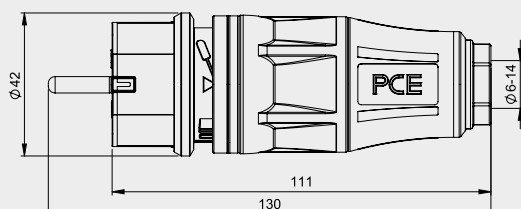

05721-sr



version	dual earthing system
plug IP54	05721-sr




pack.unit = 20 pcs.

Connector IP20

Safety connector series TOPTAURUS²

- material: PA6, 2-component rubberized
- system: Austrian/German
- screwless quick locking system for housing cover and strain relief
- standard color: black (similar to RAL9005) / red (similar to RAL3000)
- optional: LED voltage indicator, shutter
- protection class: **IP20**

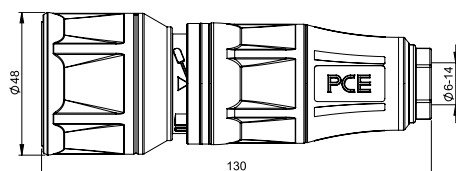

25710-sr



version	Austrian/German
connector IP20	25710-sr
with shutter	25710-src
with LED voltage indicator	25730-sr
with shutter and with LED voltage indicator	25730-src




pack.unit = 10 pcs.

Connector IP54

with cap

Safety connector series **TOPTAURUS2**

- material: PA6, 2-component rubberized
- system: Austrian/German or French/Belgian
- cap with band
- screwless quick locking system for housing cover and strain relief
- standard color: black (similar to RAL9005) / red (similar to RAL3000)
- optional: LED voltage indicator, shutter
- protection class: **IP54** dust- and splashproof

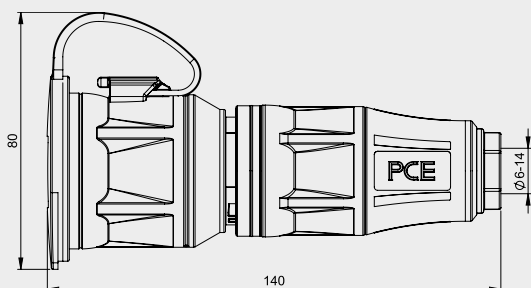

25711-sr



version	Austr./German	French/Belgian
connector IP54 with cap	25711-sr	24711-sr
with shutter	25711-src	24711-src
with LED voltage indicator	25731-sr	24731-sr
with shutter and with LED voltage indicator	25731-src	24731-src




pack.unit = 10 pcs.

Connector IP54

with hinged lid

Safety connector series **TOPTAURUS2**

- material: PA6, 2-component rubberized
- system: Austrian/German or French/Belgian
- cover with hinged lid
- screwless quick locking system for housing cover and strain relief
- standard color: black (similar to RAL9005) / red (similar to RAL3000)
- optional: LED voltage indicator, shutter
- protection class: **IP54** dust- and splashproof

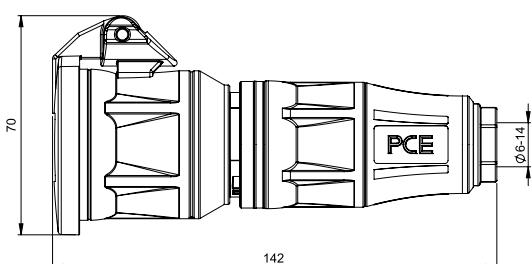

25712-sr




version	österr./deutsch	franz./belg.
connector IP54 with hinged lid	25712-sr	24712-sr
with shutter	25712-src	24712-src
with LED voltage indicator	25732-sr	24732-sr
with shutter and with LED voltage indicator	25732-src	24732-src



pack.unit = 10 pcs.

Assembly instructions

- 1** Push in direction of the arrow
to unlock contact carrier

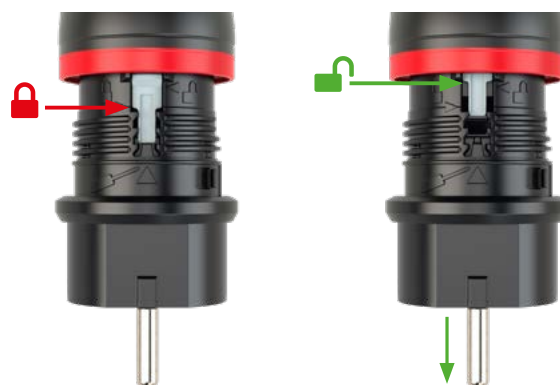

- 2** Pull out contact carrier



- 3** Insert and connect cable
Re-insert contact carrier



- 4** Tighten housing cover
contact carrier is automatically locked and
strain relief is tightened simultaneously.



Installation only by qualified
electricians or persons trained in
electrical engineering



TOP TAURUS ² technical data	Terminal cross section (mm ²)	Cable diameter (mm)	Dismantling length (mm)	Stripping length (mm)	Torques (Ncm)	
					Contact screws	Housing cover
plug	0,75 – 2,5	6 – 14	30	7	80	400
connectors	1 – 2,5	6 – 14	30	7	80	400

Special colors (minimum order quantity: 200 pcs.)

					
plug IP54	black (RAL9005)	orange (RAL2011)	yellow (RAL1016)	green (RAL6018)	blue (RAL5017)
dual earthing system (Austr./German and French/Belg.)	05721-ss	05721-so	05721-she	05721-shu	05721-sb

					
connector IP20	black (RAL9005)	orange (RAL2011)	yellow (RAL1016)	green (RAL6018)	blue (RAL5017)
Austr./German	25710-ss	25710-so	25710-she	25710-shu	25710-sb
Austr./German with shutter	25710-ssc	25710-soc	25710-shec	25710-shuc	25710-sbc
Austr./German with LED voltage indicator 	25730-ss	25730-so	25730-she	25730-shu	25730-sb
Austr./German with shutter and with LED voltage indicator 	25730-ssc	25730-soc	25730-shec	25730-shuc	25730-sbc

					
connector IP54 with cap	black (RAL9005)	orange (RAL2011)	yellow (RAL1016)	green (RAL6018)	blue (RAL5017)
Austr./German	25711-ss	25711-so	25711-she	25711-shu	25711-sb
Austr./German with shutter	25711-ssc	25711-soc	25711-shec	25711-shuc	25711-sbc
Austr./German with LED voltage indicator 	25731-ss	25731-so	25731-she	25731-shu	25731-sb
Austr./German with shutter and with LED voltage indicator 	25731-ssc	25731-soc	25731-shec	25731-shuc	25731-sbc
French/Belgian	24711-ss	24711-so	24711-she	24711-shu	24711-sb
French/Belgian with shutter	24711-ssc	24711-soc	24711-shec	24711-shuc	24711-sbc
French/Belgian with LED voltage indicator 	24731-ss	24731-so	24731-she	24731-shu	24731-sb
French/Belgian with shutter and with LED voltage indicator 	24731-ssc	24731-soc	24731-shec	24731-shuc	24731-sbc

					
connector IP54 with hinged lid	black (RAL9005)	orange (RAL2011)	yellow (RAL1016)	green (RAL6018)	blue (RAL5017)
Austr./German	25712-ss	25712-so	25712-she	25712-shu	25712-sb
Austr./German with shutter	25712-ssc	25712-soc	25712-shec	25712-shuc	25712-sbc
Austr./German with LED voltage indicator 	25732-ss	25732-so	25732-she	25732-shu	25732-sb
Austr./German with shutter and with LED voltage indicator 	25732-ssc	25732-soc	25732-shec	25732-shuc	25732-sbc
French/Belgian	24712-ss	24712-so	24712-she	24712-shu	24712-sb
French/Belgian with shutter	24712-ssc	24712-soc	24712-shec	24712-shuc	24712-sbc
French/Belgian with LED voltage indicator 	24732-ss	24732-so	24732-she	24732-shu	24732-sb
French/Belgian with shutter and with LED voltage indicator 	24732-ssc	24732-soc	24732-shec	24732-shuc	24732-sbc

(RAL colors similar)

PCE

Connection
to the future



www.pcelectric.com

PC Electric GesmbH

Diesseits 145

4973 St. Martin im Innkreis

AUSTRIA

TEL +43 7751 61220

FAX +43 7751 6969

office@pcelectric.at

098376

Vers. 02/2020

No guarantee for technical changes
or printing errors!

